
Real Questions For Exam Cisco 350-080 From Braindump2go (1-10)

CISCIO NEW UPDATED: New Updated 350-080 Exam Questions from Braindump2go 350-080 PDF Dumps and 350-080 VCE Dumps! Welcome to Download the Newest Braindump2go 350-080 VCE&PDF Dumps:

http://www.braindump2go.com/350-080.html (394 Q&As) Try 2015 Latet Updated 350-080 Practice Exam Questions and Answers, Pass 350-080 Actual Test 100% in 2015 New Year! Braindump2go Latest released Free Sample 350-080 Exam Questions are shared for instant download! Braindump2go holds the confidence of 350-080 exam candiates with Cisco Official Guaranteed 350-080 Exa Dumps Products! 394 New Updated Questions and Answers! 2015 Cisco 350-080 100% Success!350-080 Dumps,350-080 Exam Dumps,350-080 Brainfump,350-080 Questions,350-080 VCE,350-080 PDF,350-080 Actual Test,350-080 Study Guide,350-080

Book,350-080 CCIE Data Center Written Exam,350-080 Test CCIE Data Center Written Exam: 350-080

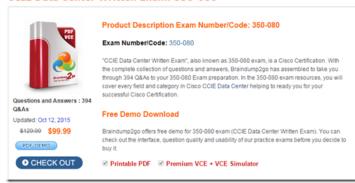

QUESTION 1In a configuration with redundant supervisors, how many IP addresses are required to configure full remote access via management 0? A. two IP addresses, one for each supervisorB. three IP addresses, one virtual IP and one physical IP for each supervisorC. one IP address that is shared among supervisorsD. none--management 0 will use the IP address from the first SVI that is created Answer: C QUESTION 2VLAN configuration using DCNM can be completed by which two supported methods? (Choose two.) A. Copy and paste the VLAN, along with its VLAN ID, name, type, admin state, and admin status, from one device to another.B. Create a single VLAN or a range of VLANs.C. A VLAN is created only after choosing File > Deploy to apply changes.D. After a VLAN is created, it requires the state to be enabled.E. Modify the existing VLAN by choosing Interface > VLAN > VLAN Settings. Answer: AB QUESTION 3Enabling jumbo frame support on a Cisco Nexus 5500 Switch can be done through which method? A. changing the default policy map from a default MTU of 1500 to 9216B. using the command system jumbomtu 9216C. using the command interface MTU 9216D. configuring the default Ethernet system class to an MTU of 9216 with a new network QoS policy map Answer: D QUESTION 4Which two statements about authentication settings for DCNM-LAN are true? (Choose two.) A. If none of the authentication servers that are configured for the current authentication mode responds to an authentication request, the DCNM-LAN server falls back to local authentication.B. DCNM-LAN only supports TACACS+.C. Each DCNM-LAN server will have the same device credentials.D. Administering DCNM-LAN authentication settings requires an authentication license.E. DCNM-LAN server users are local to the DCNM-LAN server. Answer: AE QUESTION 5DCNM is capable of monitoring the network performance of a SAN. What are the three primary areas of this operation? A. analyze traffic, device management, and network monitoring B. DCNM-SAN, DCNM-LAN, and device manager C. definition of flows, information collection, and data presentationD. SNMP poll data, MIB analysis, and report generation Answer: C QUESTION 6 What is required for proper implementation of jumbo frame support on a Cisco Nexus 2000 Series Fabric Extender? A. The interface configured as FEX fabric requires the MTU to be set to jumbo.B. The service policy must be applied to the system QoS. C. The device defaults to jumbo frame support; no changes are required.D. The switchport in the FEX interface must be set to MTU 9216. Answer: B QUESTION 7DCNM device discovery is done by connecting to Cisco NX-OS devices and doing which three of these? (Choose three.) A. collecting the running configurationB. raising the logging level to meet the minimum requirementC. discovering all devices by defaultD. discovering devices using multiple user accounts as long as they are administrator-level accountsE. using LLDP to discover network adaptors Answer: ABE QUESTION 8What does the mac packet-classify command do when applied to an interface configuration? A. It enables MAC ACLs to be applied to only IP packets that enter the interface.B. It enables MAC ACLs to be applied to only non-IP packets that enter the interface.C. It enables MAC ACLs to be applied to all packets that enter the interface.D. It enables MAC ACLs to be used for QoS settings. Answer: C QUESTION 9In a virtual port channel (vPC) configuration, VRRP exhibits which characteristic? A. VRRP does not work with

vPC due to industry standard requirementsB. VRRP works with vPC in traditional active/standby modesC. VRRP works with vPC in an active/active modeD. VRRP work with vPC as long as vPC peer-gateway is configured to address non-standard replies to the physical MAC address Answer: C QUESTION 10On Cisco Nexus 5000 Series Switches, where are the virtual output queues implemented, and what is the main purpose of virtual output queues? A. on all ingress interfaces; to ensure maximum throughput on a per-egress, per-CoS basisB. on all ingress interfaces; to provide independent congestion management and 16 queuesC. on all egress interfaces; so that a congested egress port does not affect traffic directed to other egress portsD. on all egress interfaces; to prevent head-of-line blocking by utilizing multiple virtual output queuesE. on all egress interfaces; to be able to use EEE 802.1p CoS Answer: A Braindump2go New Released Premium 350-080 Exam Dumps Guarantee You a 100% Exam Success Or We Promise Full Money Back! Download Cisco 350-080 Exam Dumps Full Version From Braindump2go Instantly!



FREE DOWNLOAD: NEW UPDATED 350-080 PDF Dumps & 350-080 VCE Dumps from Braindump2go: http://www.braindump2go.com/350-080.html (394 Q&A)