## [Sep-2020Valid Braindump2go 300-610 Exam VCE Dumps 300-610 81Q Offer[Q38-Q55

2020/Sep Latest Braindump2go 300-610 Exam Dumps with PDF and VCE Free Updated Today! Following are some new 300-610 Real Exam Questions! QUESTION 38You plan to configure LISP between two data centers. Which two LISP components most be configured? (Choose two.)A. VTEPB. the site identifierC. a map resolverD. a map serverE. VNIAnswer: CDExplanation: http://www.cisco.com/c/en/us/td/docs/ios-xml/ios/iproute\_lisp/configuration/xe-3s/irl-xe-3s- book/irl-cfg-lisp.htmlQUESTION 39 You must design an OTV implementation that supports packets fragmentation. Which option do you use? A. adjacency server to track the overlay membershipB. OTV headers defined to allow core to hash trafficC. Cisco ASR 1000 Series Aggregation Services Router that has Advanced IP ServicesD. MTU size of 9216 bytes on all the join interfacesAnswer: CQUESTION 40 Which statement accurately describe the allocation of IP pool for out of Band management of cisco? A. A maximum of eight OOB IP address can be configure to access the CIMC on the serverB. The management IP address used to access CIMC on a server can be out of band address the inter connect via the fabric uplink portC. A maximum of Sixteen OOB IP address can be configure to access the CIMC on the serverD. The management IP address used to access CIMC on a server can be out of band address the inter connect via the Management portAnswer: BQUESTION 41Which two vSphere features must be included in the design of a Cisco HyperFlex systems stretched cluster? (Choose two.)A. HAB. VSSC. FTD. VDPE. DRSAnswer: AEExplanation: https://www.cisco.com/c/en/us/td/docs/hyperconverged systems/HyperFlex HX DataPlatformSoftware/HyperFlex Stretched Clus ter/3\_5/ b\_HyperFlex\_Systems\_Stretched\_Cluster\_Guide\_3\_5.pdfQUESTION 42What can be implemented on Cisco Nexus 5600 Series Switches for link redundancy within a Fibre Channel fabric? A. vPC+B. E-TrunkC. SAN port channel D. LACP port channel Answer: DQUESTION 43Which factor determines the choice of platform designing a Cisco HyperFlex infrastructure to support computer-aided design applications? A. network speedB. GPU support C. storage capacity D. processor count Answer: CQUESTION 44What is the disadvantage of asynchronous storage replication as compared to synchronous storage replication in a disaster recovery design? A. reduction in application performance B. distance limitations C. specific backup requirements D. potential data lossAnswer: DExplanation:

https://www.evidian.com/products/high-availability-software-for-application-clustering/synchronous-replication-vs-asynchronous-replication/QUESTION 45Where does Cisco UCS handle Fibre Channel traffic failover?A. on a Cisco UCS Fabric Interconnect ASIC in Fibre Channel switching modeB. on the host, by using multipathing softwareC. in the hardware on the Cisco UCS VIC 12xx adapter or laterD. in the hardware on any Cisco UCS VIC adapterAnswer: BExplanation:

https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/unified-computing/whitepaper\_c11-701962.html QUESTION 46Which mode must be enabled on a Cisco UCS Fabric Interconnect to connect directly to a storage array? A. NPIV modeB. FC end-host modeC. NPV modeD. FC switching modeAnswer: DExplanation:

https://www.cisco.com/c/en/us/td/docs/unified computing/ucs/ucs-manager/GUI-User-Guides/Storage-Mgmt/3-1/b UCSM GUI Storage Management Guide 3 1/b UCSM\_GUI Storage Management Guide 3 1\_chapter 01110.htmlQUESTION 47Which two naming formats identify target or initiator iSCSI nodes? (Choose two.)A. WWPNB. EUIC. IQND. WWNE. OUIAnswer: CDExplanation:

https://www.cisco.com/en/US/docs/storage/san\_switches/mds9000/sw/rel\_3\_x/configuration/guides/cli\_3\_3\_1/ciscsi.html QUESTION 48What influences the number of ISLs that are required between Cisco MDS Series switches?A. FCoE protocolB. type of storageC. end-to-end oversubscription ratioD. N Port virtualizationAnswer: CExplanation:

https://www.cisco.com/c/en/us/products/collateral/storage-networking/mds-9700-series-multilayer-directors/white-paper-c11-72969 7.htmlQUESTION 49Drag and Drop QuestionDrag and drop the components from the left onto the descriptions on the right that

indicate what occurs to Fibre Channel fabric when that component fails.

fabric interconnect

The Fibre Channel fabric fails for all of the connected Cisco UCS chassis.


The Fibre Channel fabric fails for one Cisco UCS chassis.

The Fibre Channel fabric fails for some of the servers within a Cisco UCS chassis.


The Fibre Channel fabric fails for some of the servers within a Cisco UCS chassis.

The Fibre Channel fabric fails for one server.


Answer:



QUESTION 50Drag and Drop QuestionDrag and drop the technologies from the left onto the correct descriptions on the right.



Answer:

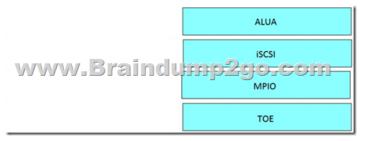

QUESTION 51You plan to implement Cisco Nexus 7000 Series switches in a data center. Which two factors must be considered for the implementation? (Choose two.)A. M-Series modules support FcoE.B. In storage VDCs, you can have only storage traffic. Each F-Series module that runs FCoE requires an FCoE license.D. F1-Series and F2-Series modules cannot exist in the same VDC.E. F3-Series modules lack support for FEX.Answer: CEQUESTION 52Which two statements accurately describe a Cisco UCS Fabric Interconnect cluster? (Choose two )A. Only the active Fabric Interconnect forwards data trafficB. The Fabric Interconnect cluster uses a Cisco UCS B-Senes Blade Server chassis to forward data when the L1-L2 links are downC. The Fabric Interconnect cluster uses a virtual IP address for management connectionsD. The Fabric Interconnect uses L1-L2 links to forward data when the primary Fabric Interconnect uplinks are down.E. primary Fabric Inter connect node conies up after a failure, the node compares the Cisco UCS system database version to Fabric InterconnectAnswer: CEQUESTION 53Which statement accurately describes the configuration requirements for disjoint Layer 2 networks on Cisco UCS?A. The Cisco UCS fabric Interconnect must be in switch mode.B. The VLAN IDs must overlap in both Layer 2 domains.C. All of the uplinks most be in one port channel to keep all of the ports active.D. The Cisco UCS Fabric Interconnect must be in end-host motto. Answer: DQUESTION 54Which two configurations allow for routing traffic between two VDCs? (Choose two.)A. Connect the VDCs to an external Layer 3 device.B. Cross-connect the ports between the VDCs.C. Create VRF-aware software infrastructure interfaces.D. Create a policy map in the default VDC that routes traffic between the VDCs.E. Create interfaces in the VDC that can be accessed by another VDC. Answer: ADQUESTION 55Refer to the exhibit. A Cisco UCS chassis that has two IOMs is discovered. The chassis discovery policy creates a fabric port channel. What is the result of this policy?

FI-A IOM-A UCS Chassi

A. Cisco UCS Manager creates two separate fabric port channels.B. Cisco UCS Manager creates a single fabric port channel.C. The port channel is disabled until an administrator enables it manually.D. Each uplink that connects an IOM is configured as a discrete link.Answer: AResources From:1.2020 Latest Braindump2go 300-610 Exam Dumps (PDF & VCE) Free Share: https://www.braindump2go.com/300-610.html2.2020 Latest Braindump2go 300-610 PDF and 300-610 VCE Dumps Free Share: https://drive.google.com/drive/folders/1-\_mRnMoWZa3gT8x6ZLE-tDSAB0k08ME\_?usp=sharing3.2020 Free Braindump2go 300-610 PDF Download:https://www.braindump2go.com/free-online-pdf/300-835-Dumps(38-48).pdf

https://www.braindump2go.com/free-online-pdf/300-835-PDF(16-26).pdf

https://www.braindump2go.com/free-online-pdf/300-835-PDF-Dumps(49-59).pdf

https://www.braindump2go.com/free-online-pdf/300-835-VCE(27-37).pdf

https://www.braindump2go.com/free-online-pdf/300-835-VCE-Dumps(1-15).pdfFree Resources from Braindump2go,We Devoted to Helping You 100% Pass All Exams!